

GWLR4K60KIT

## Ultra Long-Range Wireless 4K @ 60Hz Video Extender Kit



- Quickly add or change TV/display locations as needed
- Wirelessly send 4K Ultra HD video up to 600 ft.
- Supports 4K UHD resolutions of up to 3840 x 2160 @ 60Hz refresh rates
- Perfect for large homes, retail, medical lobbies, and small commercial applications
- Transmit from an HDMI®-enabled source to up to 3 TVs with additional receivers (GWLR4K60RX)

### Flexible TV or Display Placement


Enjoy crystal-clear quality from an HDMI 2.0 source and the newest 4K Ultra High Definition (UHD) High Dynamic Range TVs and content with resolutions reaching 3840 x 2160 at a 60Hz refresh rate. By eliminating the bulk of HDMI wiring over long distances, the Wireless 4K Video Extender affords greater flexibility in TV/display placement. Quickly place TVs in temporary environments such as on a patio or in the kitchen and add a second or third TV with additional wireless receivers.

### Control Source Device Remotely With IR Support

Easily control your source remotely from the TV with the included IR blast and extension cables. Once the IR cables are connected, point your remote control at the Wireless 4K Video Extender's receiver and press a button to control the source. This feature only works from the system's HDMI receiver (GWLR4K60RX).

- Quickly add or change TV/display locations as needed
- Wirelessly send 4K Ultra HD video up to 600 ft.
- Supports 4K UHD resolutions of up to 3840 x 2160 @ 60Hz refresh rates
- Perfect for large homes, retail, medical lobbies, and small commercial applications
- Transmit from an HDMI®-enabled source to up to 3 TVs with additional receivers (GWLR4K60RX)
- Control sources & extend the IR remote range using the included IR blasters
- Secure 5 GHz 802.11ac Wi-Fi WPA-2 personal security encryption
- HDMI 2.0 and HDCP 2.2 Compliant
- H.264 Video compression
- Plug-N-Play solution - No existing wireless network needed



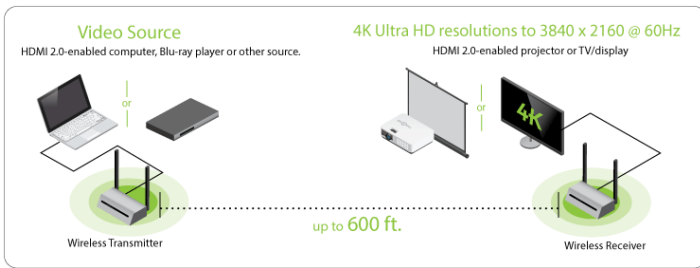

### Requirements

- **Display**
- Display or Projector with HDMI Input
- 
- **Media Source**
- 1 HDMI Output

### Package Contents

- 1 x Ultra Long Range Wireless Transmitter with HDMI
- 1 x Ultra Long Range Wireless Receiver with HDMI
- 2 x HDMI Cables
- 2 x Power Adapter
- 1 x IR Blast Cable
- 1 x Extender Cable
- 1 x Quick Start Guide
- 1 x Warranty Card

## Specifications

Function	GWLR4K60KIT	Dimensions	GWLR4K60KIT
<b>Connectors</b>		<b>Unit Dimensions</b>	
Video Output	HDMI 2.0/ HDCP 2.2	Height	1.75 in
Power	1 x Power Jack	Depth	4.50 in
<b>Video Resolution</b>		Length	7.63 in
3840 x 2160 @ 60Hz; 1920x1080@60Hz;1680x1050@60Hz;1440x900 @60Hz; 1360x768 @60Hz;1280x1024 @60Hz;1280x960@60Hz; 1280x720@60Hz;1024x768@60Hz;800x600@60Hz		<b>Unit Package Dimensions</b>	
<b>Video Streaming</b>		Height	6.00 in
<200ms Latency H.264		Depth	3.35 in
<b>Audio</b>		Length	14.75 in
Audio Output	L/R Stereo Audio	<b>Master Carton</b>	
Codec	PCM	Width	15.50 in
<b>Frequency</b>		Height	11.25 in
5.1 ~ 5.8 G Wireless Transmission		Depth	13 in
<b>Antenna Type</b>		Master Carton Qty.	6
Dual Hi-Gain 5 DBi		<b>Weight</b>	
<b>Operating Range</b>		Master Carton Wt.	31.31 lb (14.2 KGs)
Up to 600 Feet		Unit Pack Wt.	4.85 lb (2.2 KGs)
<b>Infrared</b>		Unit Wt.	1.45 lb (0.66 KGs)
Frequency	IR Passback 20-60 KHz		
<b>Housing</b>			
Case	Iron alloy and crystal panel		
<b>Power</b>			
Amps	3.1 A		
Voltage	5 VDC		
<b>Warranty</b>			
1-Year			
<b>Operating Temperature</b>			
32~122°F (0~50°C)			
<b>Power Consumption</b>			
TX <11W / RX <12W			
<b>Environment</b>			
Humidity	0?90%		
<b>Transfer Rate</b>			
18 Gbps			